


BACKSETS			
2 3/4"	3 3/4"	5"	
STANDARD	23 PREFIX	25 PREFIX	

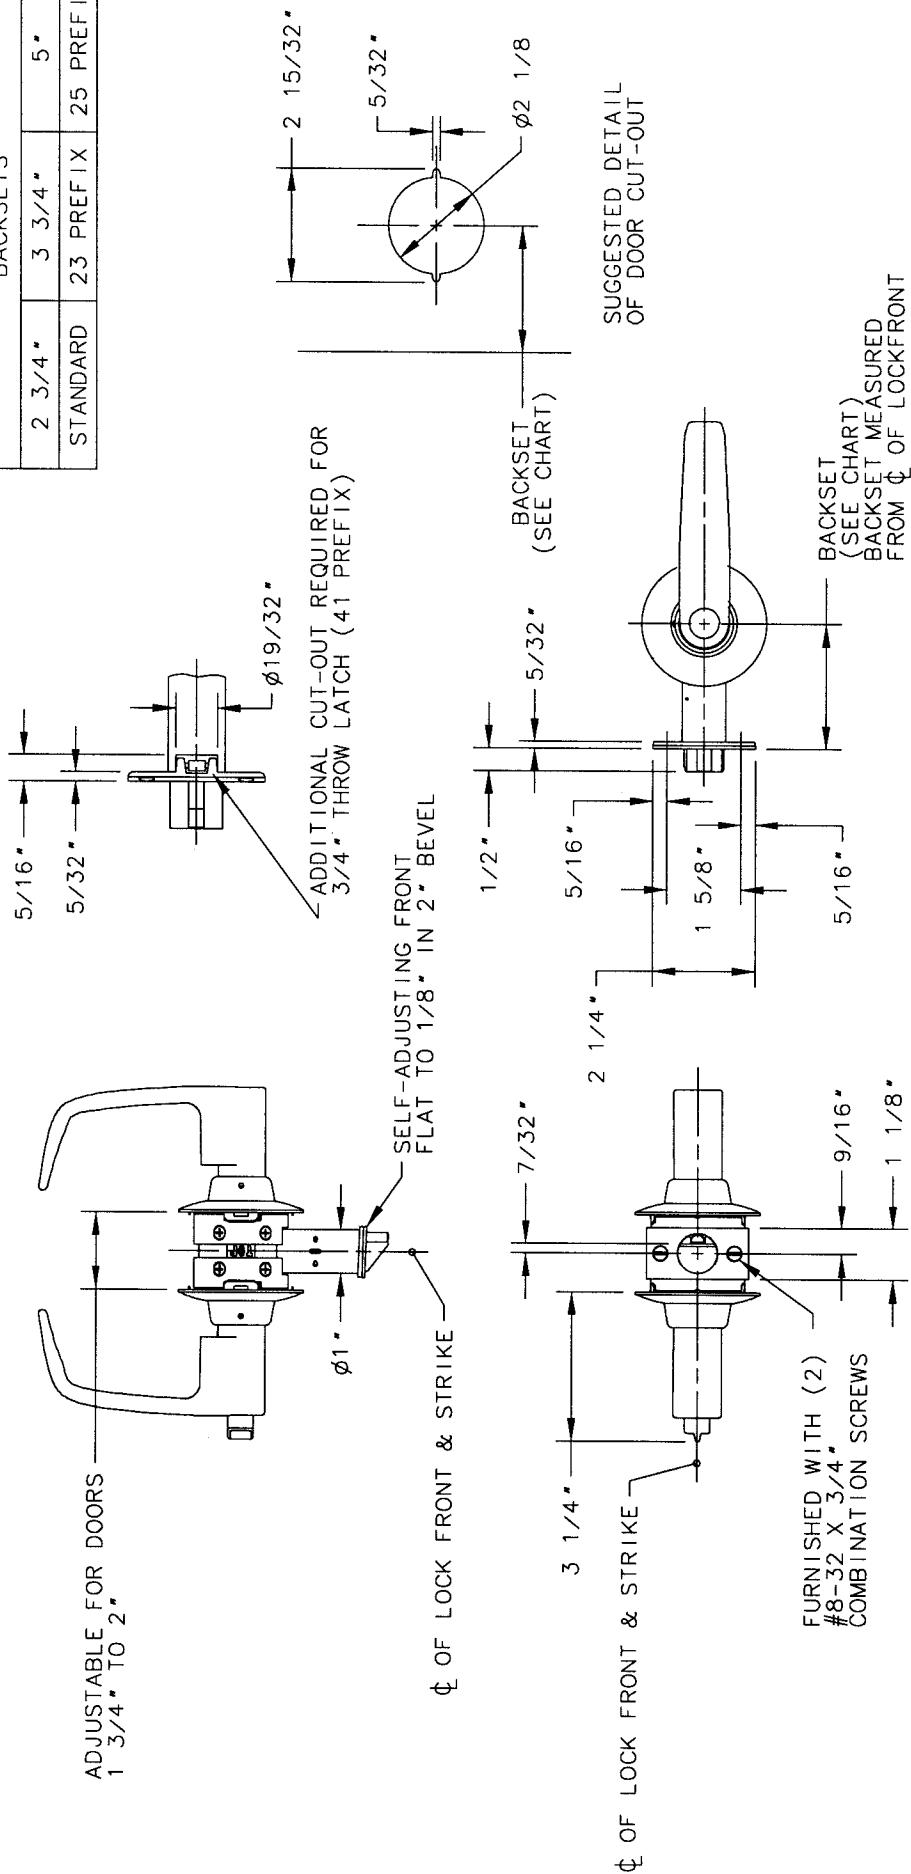

- NOTES:
1. ON METAL DOORS LOCK AND LATCH MUST HAVE MINIMUM REINFORCEMENT PER A115.2
 2. ALL FUNCTIONS (EXCEPT 93 & 94) WILL FIT CURRENT ANSI STANDARD A115.2 DOOR PREPARATION FOR 2 3/4" BACKSET. FOR REGULARLY FURNISHED STRIKE, SEE TEMPLATE NO 4131. FOR 4 7/8 STRIKE SEE TEMPLATE NO 4049. MODIFY DOOR PREPARATION FOR 3 3/4" & 5" BACKSETS.
 3. SAME MORTISING FOR ALL FUNCTIONS (EXCEPT 93 & 94), SEE TEMPLATE NO 4539.
 4. DIMENSIONS SHOWN ARE MAXIMUM PART DIMENSIONS.
 5. ROSE AND LEVER DIMENSIONS VARY BY DESIGN, ROSES AVAILABLE ARE 2 3/4" DIA, 3 1/2" DIA AND 3 1/8" SQUARE.

SARGENT® Manufacturing Company
100 Sargent Drive New Haven, CT 06511

RELEASE DATE


MARCH 01

TEMPLATE NO.


11 LINE T-ZONE LEVER LOCK

4527A


BACKSETS			
2 3/4"	3 3/4"	5"	
STANDARD	23 PREFIX	25 PREFIX	

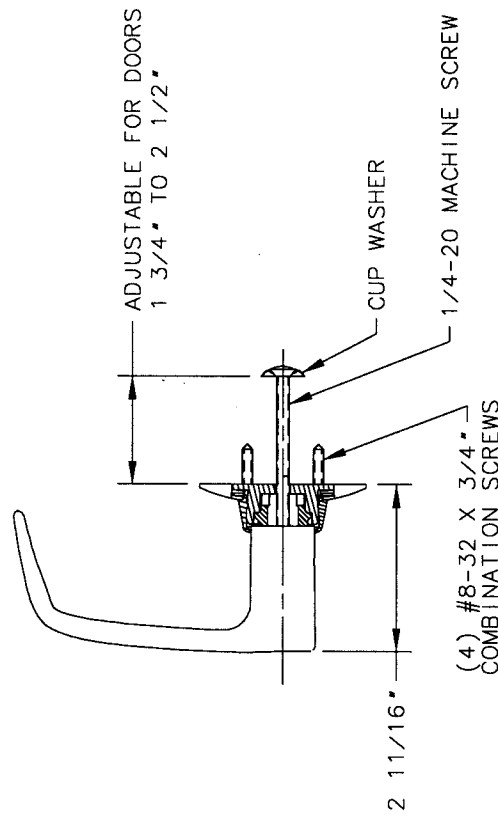

93 FUNCTION

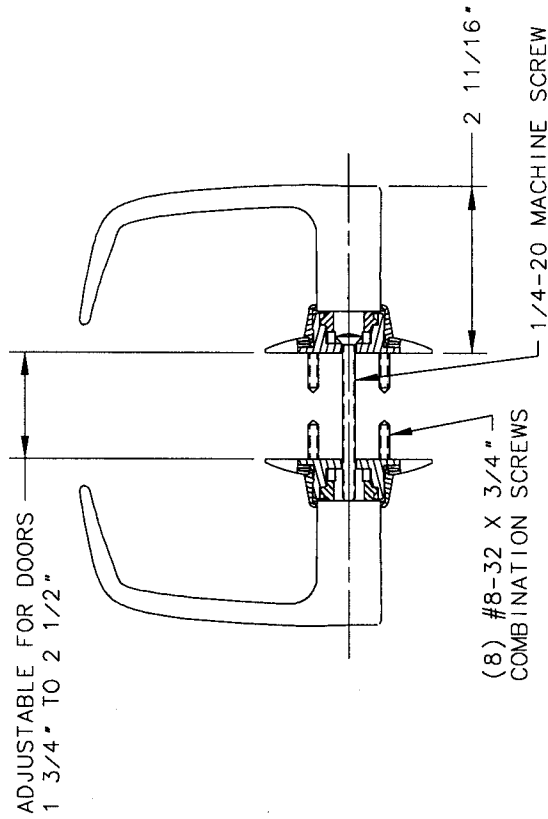


94 FUNCTION

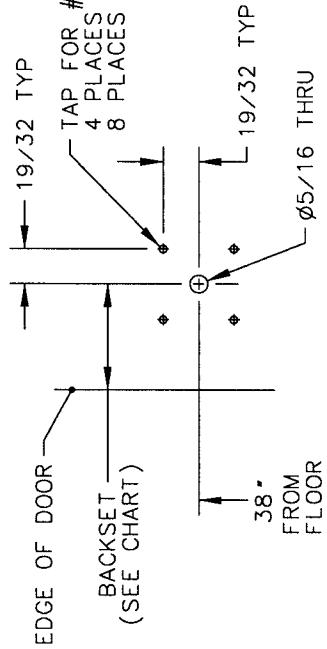

SUGGESTED DETAIL
OF DOOR PREPARATION

- NOTES:
1. ROSE AND LEVER DIMENSIONS VARY BY DESIGN. ROSES AVAILABLE ARE 2 3/4", DIA 3 1/2" DIA AND 3 1/8" SQUARE.
 2. METAL DOOR REINFORCEMENT TO BE AT LEAST EQUIVALENT TO THAT SHOWN ON ANSI A115.2.

SARGENT[®] Manufacturing Company 100 Sargent Drive New Haven, CT 06511	
11 LINE T-ZONE LEVER LOCK 93 & 94 FUNCTION	RELEASE DATE MARCH 01 TEMPLATE NO. 4539A

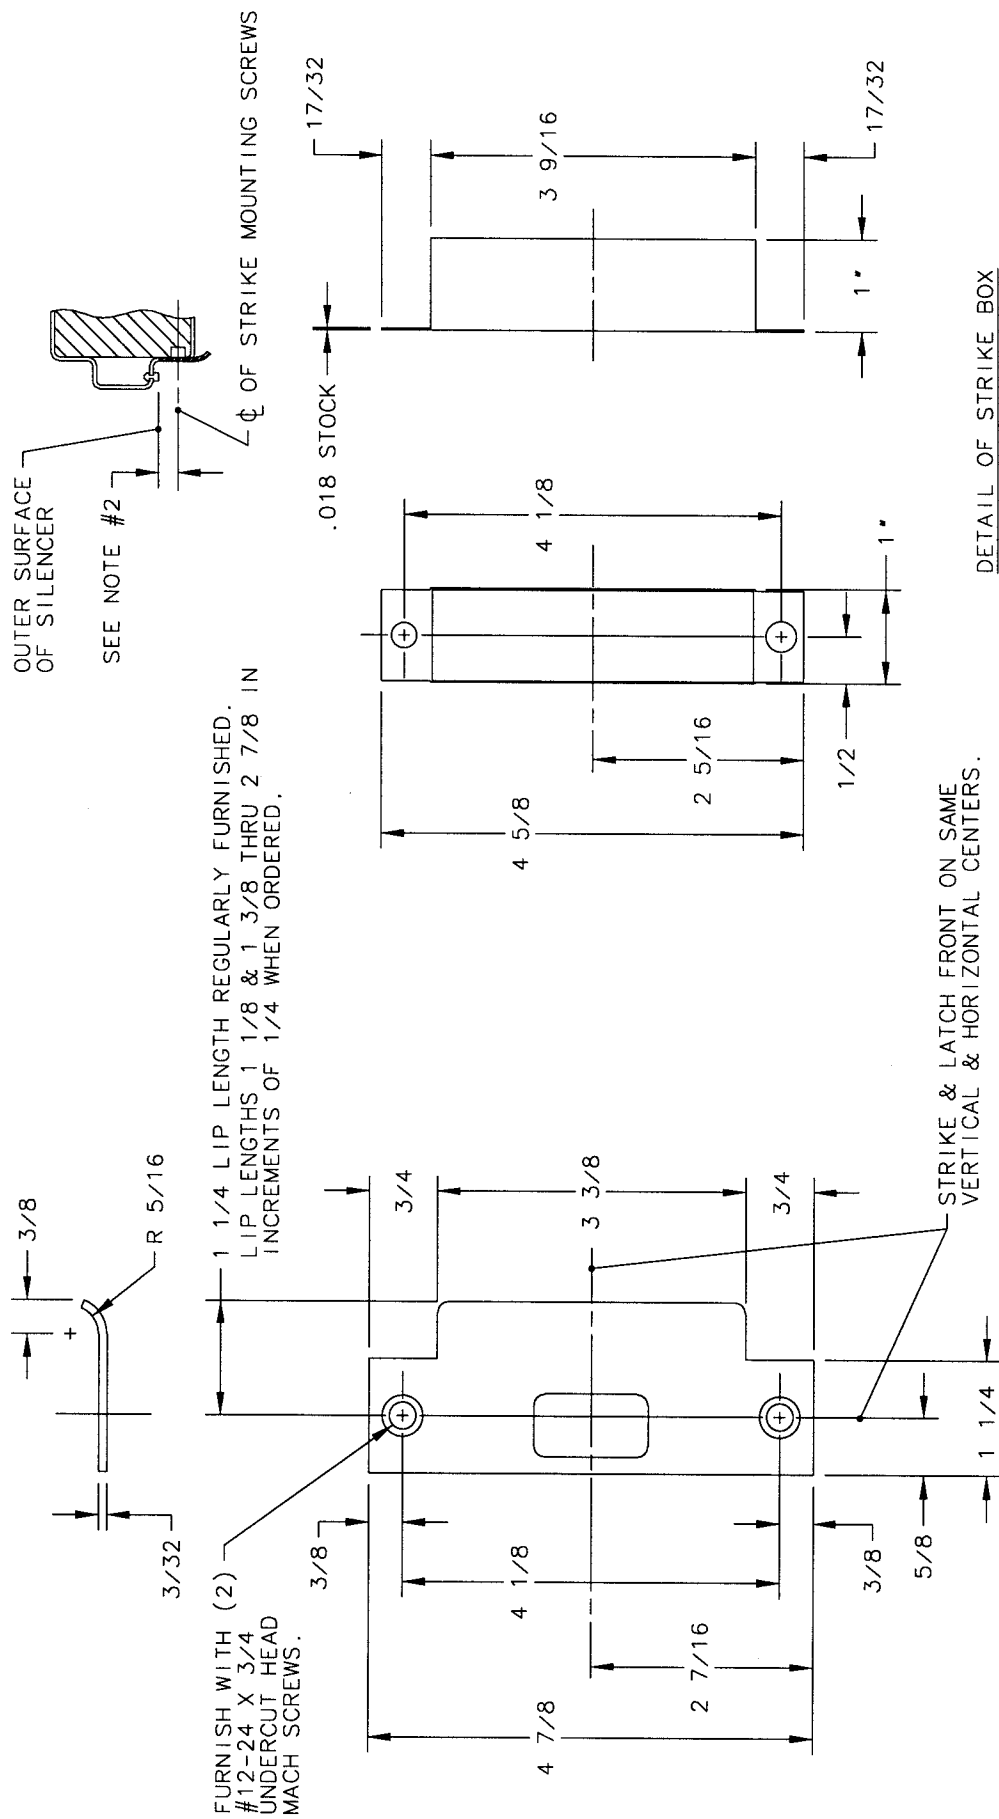

- NOTES:
1. STRIKE OUTLINE FOR FRAME FITS CURRENT ANSI A115.2 STANDARD.
 2. 3/32 MORTISE DEPTH PERMISSIBLE FOR STRIKE OR STRIKE & STRIKE BOX. WHEN DOOR SILENCERS ARE USED ON DOOR FRAME LOCATE CENTERLINE OF STRIKE FROM SURFACE OF DOOR SILENCER AS SHOWN.
 3. DIMENSIONS SHOWN ARE MAXIMUM PART DIMENSIONS.
 4. STRIKE BOX FURNISHED ONLY WHEN SO ORDERED.
 5. FRAME MANUFACTURER TO PROVIDE SUFFICIENT REINFORCEMENT.

SARGENT® Manufacturing Company 100 Sargent Drive New Haven, CT 06511	
808 CURVED LIP STRIKE	RELEASE DATE MARCH 01
TEMPLATE NO. 4049W	